




THERMOSTAT BYPASS

Required Tools

1. Standard Screwdriver (1/8" TIP)
2. Standard Screwdriver (1/4" TIP)
3. Phillips Screwdriver (Size #2)

Symptom- The heat light will not come on and the machine does not heat.

WARNING: BEFORE MAKING REPAIRS, BE SURE ON/OFF SWITCH IS OFF AND MACHINE IS UNPLUGGED!

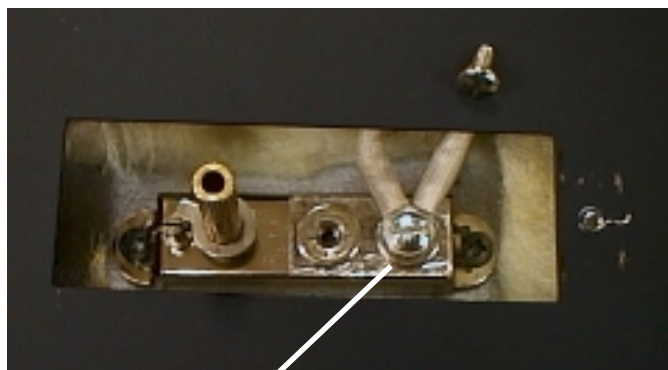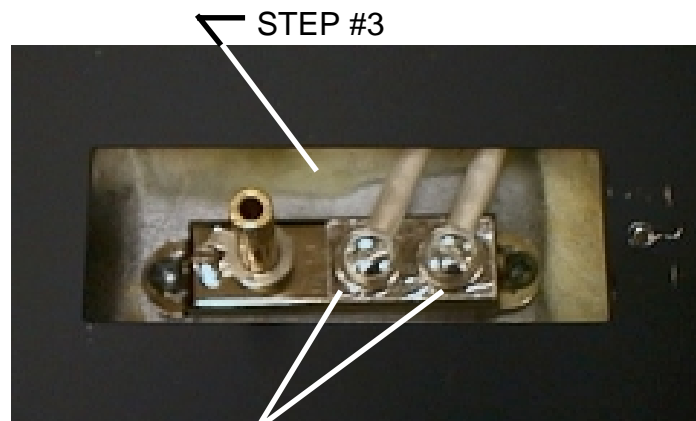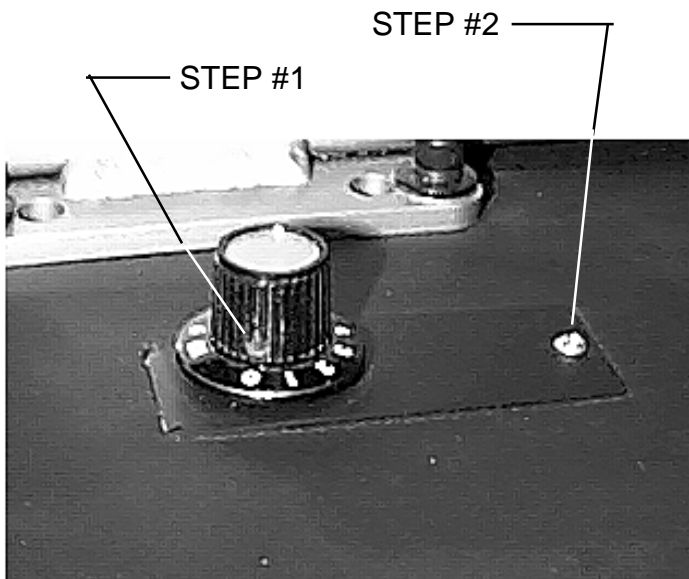

1. Loosen recessed set screw with 1/8" tip Standard Screwdriver and remove thermostat control knob.
2. Remove phillips head screw from thermostat cover.
3. Carefully push insulation out of the way.
4. Remove (2) thermostat wires, with 1/4" tip Standard screwdriver.
5. Replace both thermostat wires on rear screw terminal post and tighten the connection.
6. Apply power and note if the heat light comes on and the machine starts to heat.
7. If the heat light comes on and the machine starts to heat, then turn the machine off and unplug the power cord. Replace the thermostat as outlined in CS-67.
8. DO NOT ALLOW THE MACHINE TO BE OPERATED WITH THE THERMOSTAT BYPASSED.

Note: Bypassing the thermostat is only a test. Operating the machine with the thermostat bypassed will cause the machine to overheat and create a potential fire hazard.