

# MUG PRESS LINER INSTALLATION

## REQUIRED TOOLS:

Straight Blade Screwdriver or  
3/32" Allen Wrench  
(Tool type depends on the fastener used)

## WARNING:

**MAKE SURE THAT YOUR  
MACHINE IS UNPLUGGED!**

## PERFORM THE INSTALLATION OF THE LINER AS FOLLOWS:

1. Using the appropriate tool, remove the four fasteners on the stationary end of the heater band (Photo A). Place the slip-liner onto the surface of the heater band with the flanged end of the liner on the unbolted side of the heater.
  2. Re-assemble the end of the heater, making sure to replace all of the hardware in the proper order. Refer to the other end of the heater if necessary. Start to thread in the fasteners but do not tighten them all of the way.
  3. Place a mug into the press and close it several times to seat the liner (Photo B). Make sure the sharp edges of the band and liner are not sticking out from the side and are even up and down (refer to the other end of the heater). Remove the mug and tighten the fasteners. It will be necessary to hold everything in place while tightening the fasteners (Photo C). Place the mug back into the press to verify that everything looks correct. If it does, it is time to test it with a transfer.
- If there is a problem with the transfer process after the installation, it is likely due to heater band mis-alignment. Please refer back to step # 3.



Photo A

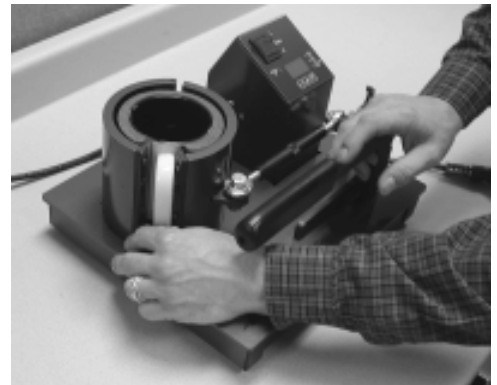


Photo B



Photo C