

D-TXE-2-18/TXE-1620

Electromechanical Automatic Presses

OWNER'S MANUAL



TXE-1620SS



D-TXE-2-18W

doughXpress

For Customer Service, Call **1-800-835-0606**
or Visit www.doughXpress.com

CONTENTS

Receiving & Setup	2
Operation	3
Setting Temperature & time	4
Preference Settings	5
Machine Presets	6
Machine Presets	7
Cycle Count	8
Temperature & Time Modes	9
Pressing Dough	10
Pressing Dough	11
Pizza Dough Shrinkage	12
Frequently Asked Questions	13
Frequently Asked Questions	14
Cleaning / Maintenance	15
Warranty	16

BEFORE warranty repair you MUST get Prior Authorization:

RECEIVING & SETUP

● ● ● ● PLEASE READ THIS MANUAL IN ITS ENTIRETY ● ● ● ●
BEFORE OPERATING YOUR PIZZA PRESS.

INSPECTION

Inspect your box and machine for hidden shipping damage. Contact the delivery company immediately, should you find damage.

PLATEN SURFACE

Slight surface imperfections are a normal part of the aluminum casting process for the platens on your press. These are not considered a defect and do not affect the functionality of the machine in any way.

SHIPPING OR RETURNS

NOTE: Save all of your shipping/packing materials.

DO NOT RISK COSTLY SHIPPING DAMAGE!

SHIP ONLY IN ORIGINAL BOX.

1. Fasten machine to plywood shipping base with bolts provided.
2. Make sure handle is pressed down so that the heat platen will not swing around during shipment.
3. Place in original box, and put side liner and top liner in place. Fold in flaps and seal the box.

****Additional bottom boards, box and liners may be obtained from your supplier for a nominal cost.***

INSTALLATION


1. Lift press from skid and place on cart, if you purchased one with the press. Align legs with holes in top of cart and bolts (supplied) fasten to cart. You will need a 9/16 wrench.

CAUTION: Heavy lifting can cause injury. We recommend two person lifting or use of a mechanical aid when handling this press. Remember to always maintain natural curves of back and bend knees to lift.

2. Plug the cord of the press into a correctly grounded electrical outlet. The correct voltage is indicated on the identification tag of the press.
3. Remove wrap from handle and platens.

WARNING: Do not use an extension cord to supply power to your press.

OPERATION

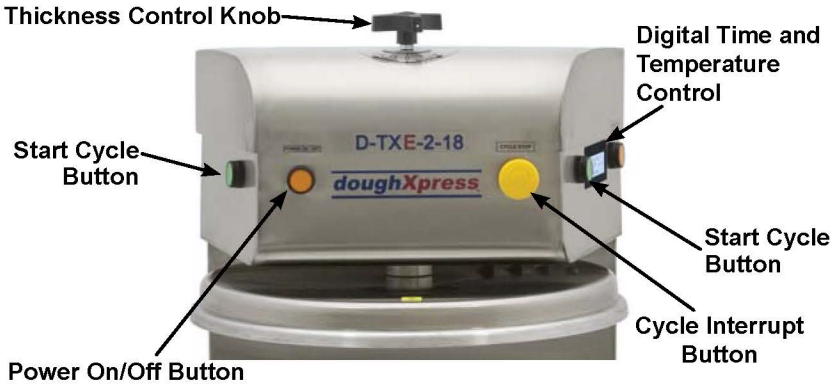

PREPARATION

1. Turn on the machine by pushing the on/off switch.


Startup/Splash screen is displayed as the controller boots up.

NOTE: The current program number and the software revision of the controller are displayed at startup. (The default settings are program number P 11 for °F, P 12 for °C and software revision RV 1.0)



Startup/Splash Screen


After boot up, the home screen is displayed showing the current heat platen temperature and set cycle time. The heat indicating lamp is represented by the snowflake in the upper left corner of the display. The heat indicating lamp will display anytime the heating element is heating and will cycle on and off after the set temperature is reached to maintain set temperature.

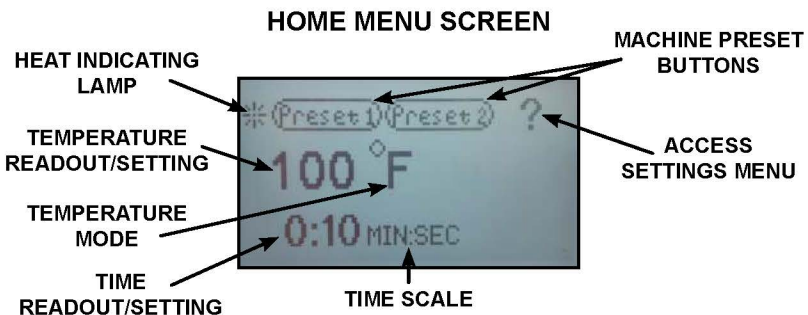

SETTING TEMPERATURE & TIME

ADJUST TEMPERATURE:

TEMPERATURE ADJUSTMENT SCREEN

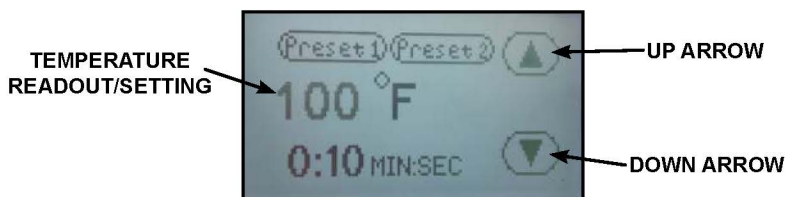

1. Touch the temperature readout on the display. “UP” ▲ and “DOWN” ▼ arrows will appear on the right side of the display and the temperature value will start flashing and to indicate it is in set mode.
2. Press the “UP” ▲ or “DOWN” ▼ arrow to change the temperature value. Holding down on an arrow will change the temperature in 1 degree increments for 10 values; then change to 10 degrees incremental changes.
3. Once the desired temperature value is set, either press the temperature value to lock the set temperature or simply wait for 2 seconds and it will lock in the new value automatically.

ADJUST CYCLE TIME:

1. Touch the time readout on the display. “UP” ▲ and “DOWN” ▼ arrows

TEMPERATURE ADJUSTMENT SCREEN




- will appear on the right side of the display and the cycle time value will start flashing and to indicate it is in set mode.
2. Press the “UP” ▲ or “DOWN” ▼ arrow to change the cycle time value. Holding down on an arrow will change the time in 1 second increments for 5 values; then change to 10 seconds incremental changes.
3. Once the desired cycle time value is set, either press the time readout to lock the cycle time or simply wait for 2 seconds and it will lock in the new value automatically.

PREFERENCE SETTINGS

SETTINGS:

1. Press the “?” on the upper right corner of the display on the **Home Menu Screen** to access the settings menu.
2. Press the settings sub menu title to be adjusted.

SETTINGS MENU SCREEN

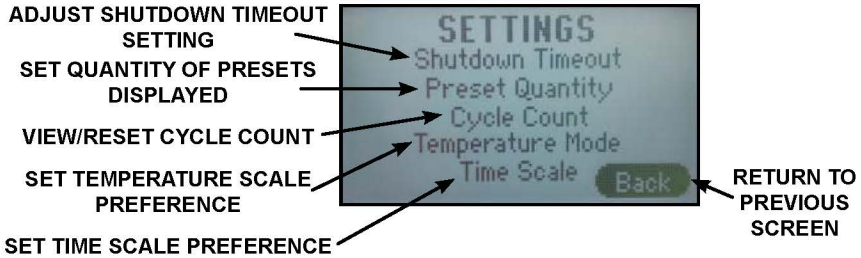

SHUTDOWN TIMEOUT

The shutdown feature shuts off the heat to the press after a period of inactivity.

SHUTDOWN TIMEOUT ADJUSTMENT SCREEN



NOTE: The factory default is set at 3.0 hours.

1. From the settings menu press the “**Shutdown Timeout**” sub menu title.
2. Press the “UP” ▲ and/or “DOWN” ▼ arrows to set the desired shutdown time.

NOTE: Shutdown time adjusts in 1/2 hour intervals. Press the “Down” ▼ button until “Disable” is displayed will deactivate this setting.

3. Press “**Save**” to save the setting.
4. Press “**Back**” to return to the previous screen.

NOTE: After the shutdown time has elapsed with the press idle, the heating element will stop cycling to maintain the set temperature and the home screen will display “**SHUTDOWN.**” Touching the display or closing the press will take the machine out of shutdown mode.

MACHINE PRESETS

PRESET QUANTITY


Temperature presets can be stored in the memory for different transfer settings. By default two presets are displayed. This setting can be adjusted to display four presets.

PRESET QUANTITY DISPLAYED PREFERENCE SCREEN



1. From the settings menu press the **"Preset Quantity"** sub menu title.
2. Press the number of presets to be displayed on the home screen, either **"Two Presets"** or **"Four Presets."**

TWO PRESET DISPLAY
ON HOME MENU SCREEN



FOUR PRESET DISPLAY
ON HOME MENU SCREEN




3. Press **"Save"** to save the setting.
4. Press **"Back"** to return to the previous screen.

MACHINE PRESETS

STORING PRESETS:

NOTE: The factory default settings for all presets is set to 200°F and 10 seconds.

HOME MENU SCREEN

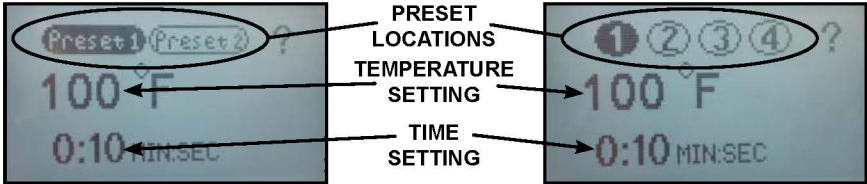


1. Set the desired temperature and/or cycle time using the temperature and time adjustment instructions in this document.
2. Press and hold the desired preset location for two seconds. The controller will beep and the preset location button will display in reverse indicating the preset is stored in memory.


RECALLING PRESETS:



PRESET 1 SELECTED
(two preset setting shown)



PRESET 2 SELECTED
(two preset setting shown)



1. Press and release for approximately 1/2 second the preset button to recall. The controller will beep and the preset location button will display in reverse indicating the preset has been changed.

NOTE: The new set values will display for 1 second before the controller starts adjusting the temperature or time to match the new setpoint.


CYCLE COUNT

CYCLE COUNT

The cycle count feature counts the number of cycles that the machine has undergone. A cycle is counted every time the countdown timer is activated by closing the press.

NOTE: The cycle count will maintain the total count even if the power has been turned off.

CYCLE COUNT/CYCLE COUNT RESET SCREEN

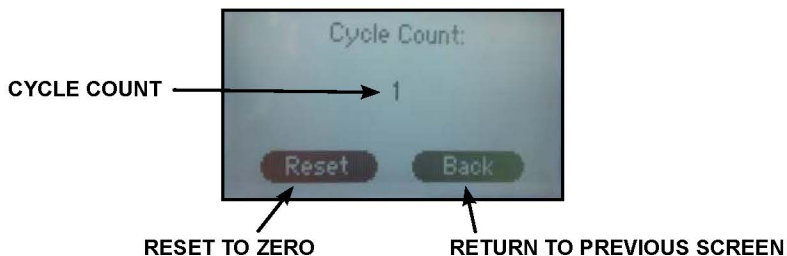

TO RESET THE COUNTER:

1. From the settings menu press the "Cycle Count" sub menu title.
2. Press "Reset."
3. Press "Back" to return to the previous screen.

TEMPERATURE & TIME MODES


TEMPERATURE MODE

Temperature Mode controls which temperature scale is displayed on the controller home screen.

F = Fahrenheit

C = Celsius

TEMPERATURE MODE PREFERENCE SCREEN

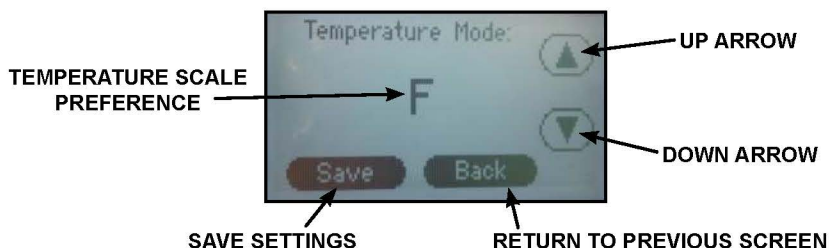

TO CHANGE THE SCALE:

1. From the settings menu press the **"Temperature Mode"** sub menu title.
2. Press the "UP" ▲ or "DOWN" ▼ arrows to select the preferred temperature scale.
3. Press **"Save"** to save the setting.
4. Press **"Back"** to return to the previous screen.

TIME SCALE

The time scale setting adjusts how the time is displayed on the home screen. There are three Time Scale display options available in the Time Scale menu:

- **MIN:SEC** (Factory Default)
- **SEC** (Seconds)
- **1/10 SEC** (1/10 Second Resolution)

TO CHANGE THE SCALE:

TIME MODE PREFERENCE SCREEN



1. From the settings menu press the **"Time Scale"** sub menu title.
2. Press the "UP" ▲ and/or "DOWN" ▼ arrows to select the preferred time scale.
3. Press **"Save"** to save the setting.
4. Press **"Back"** to return to the previous screen.

PRESSING DOUGH

PRESSING DOUGH

Your dough press is designed for easy use and operation to reliably press dough balls. Thickness, shape, and size are directly related to your dough ball, its shape, the temperature of the dough, the recipe of your dough, type of lubricating food oil, as well as the settings of your machine. You should experiment with the following for the results you want.


1. Depress the on/off button to “on”. Button should illuminate when power comes on.
2. Set the desired temperature on the time/temperature control panel as instructed in this manual. Both flour and corn tortillas generally start at 325°F then raise or lower the temperature until the desired results are achieved. Pizza dough settings typically run 110°-130°F for room temperature dough and 140°-150°F when using refrigerated dough. A temperature indicating alarm will sound once the set temperature has been reached.

WARNING: Never attempt to press frozen dough. Personal injury and damage to your machine could result!

NOTE: This symbol represents “Hot Surfaces”



3. With the press in the open position, adjust the press to the desired thickness by turning the thickness control knob located on the top of the machine. Thickness is reduced by turning knob **clockwise** and increased by turning it **counterclockwise** as indicated below.

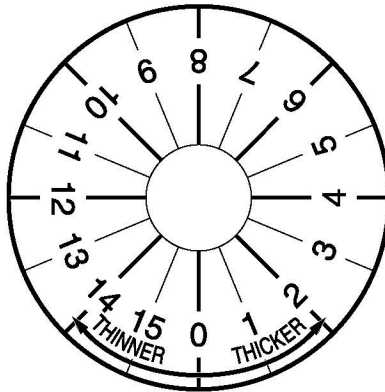

Thickness setting should be set so that the heat head will lock down firmly with your product in place.

PRESSING DOUGH

NOTE: Adjustments may be required from one product to another and will vary to achieve the desired result.

CAUTION: Excessive pressure can cause structural damage, voiding the machine warranty!

WARNING: Make all adjustments while press is open. Adjusting the thickness while under pressure will result in damage to the press.

4. Lightly lubricate the lower platen with olive oil, food/cooking oil or other food release lubricant.

NOTE: Due to the sticky nature of corn tortillas, pressing works best placing the dough ball between two sheets of parchment paper.

5. Place your preformed dough ball on the lower platen and add a small amount of your food lubricant to the top of the dough ball. **Do not add flour or dust with flour.**
6. Place each hand on a green start button on the sides of the press. Together hold the buttons in until the upper platen fully lowers and then release. The timer activates and will automatically open the press at the end of the time you have set. **CAUTION: DO NOT OPERATE THIS PRESS WITH ANY OTHER PERSON(S) / HAND(S) NEAR YOU OR THE PRESS. SERIOUS INJURY COULD RESULT.**
7. After the designated time has elapsed (generally, 2-3 seconds for room temperature tortilla dough or 3-10 seconds for room temperature pizza dough, raise the handle all the way up to the open position.

TIP: Dough balls at room temperature gives you the best results.

8. Remove your flattened dough. For best results, finish tortillas by heating them on a tortilla warmer set to 425°F - 450°F for 15-20 seconds on each side. When pressing pizza dough, remove your flattened dough and place on screen or pan with the top side (side towards upper platen when pressed) face down. You are now ready for final shaping, edging, and toppings.
9. Press the on/off switch to turn press "OFF" when you are finished using the press for the day. This will turn power off to the entire machine.

DOUGH BALL WEIGHTS

<u>FINISHED SIZE</u>	<u>WEIGHT OF DOUGH BALL</u>	
	TORTILLA	PIZZA
6"	1-1.5 oz.	5-8 oz.
8"	1.5-2.5 oz.	6-10 oz.
10"	2.5-3.25 oz.	8-12 oz.
12"	3.25-3.75 oz.	16-18 oz.
14"	4-4.5 oz.	18-20 oz.
16"	4.5-5 oz.	20-22 oz.
18"	—	22-24 oz.

NOTE: Final size is determined by combination of weight of dough ball and thickness setting. Flour Tortillas thickness will vary in final product.

PIZZA DOUGH SHRINKAGE

WAYS OF OVERCOMING THIS PROBLEM:

Get an idea of the following:

1. Recipe

- What is the percentage of water content in the dough?
- What is the percentage of oil content in the dough?

2. Mixing

- Mixing procedure, such as water temperature and mixing speed.

3. Dough Preparation

- What is the time between mixing and pressing?
- How is the dough being stored?

4. Pressing

- What is the temperature of the dough when pressing?
- What is the temperature of the press when pressing?
- How long is the dough being pressed?

FREQUENTLY ASKED QUESTIONS

TORTILLA

Q: Why won't my dough press to size?

- Weight of the dough ball - not enough dough
- Set to thick - change thickness setting
- Dirty or unclean platens

Q: Why won't my dough press out even?

- Machine - placement
- Unlevel platens

Q: Why is my dough coming apart when I press it?

- pressing too long with too much heat
- not enough oil on dough ball
- build up on platens

Q: What temperature should I be pressing at?

- 275° - 325°F

Q: How long should I be pressing the dough?

- 2 -3 seconds

Q: Can I press corn tortillas?

- Yes - *but you need to use either parchment or baking paper...*
 - a. Place paper down on the platen*
 - b. Place dough ball(s) on paper*
 - c. Place another sheet of paper on top of dough ball(s)*
 - d. Press*

Q: Can I cook the tortillas on the press?

- Yes - *cooking the tortillas on the press can be done in the following manner*
 - a. Set press temperature 275° - 325°*
 - b. Press dough ball(s) 2-3 second press*
 - c. Lift handle and leave tortillas on lower platen for 1 - 1:30 min.*
 - d. Turn tortillas over and leave on lower platen for 1 - 1:30 min. on second side.*
 - e. Remove*

NOTE: For faster production and a better finished product, it is recommended to use a two step process using a tortilla press and tortilla warmer.

FREQUENTLY ASKED QUESTIONS

PIZZA

Q: Why won't my dough press to size?

- Weight of the dough ball - *not enough dough*
- Temperature of the dough ball might be cold - *higher temp/ longer press time*
- Set to thick - *change thickness setting*

Q: When I press my dough it gets sticky? Why?

- Very wet dough - *turn up temperature*
- Platens are not clean - *possible flour build up*

Q: Why won't my dough press out even?

- Unlevel platens

Q: Why is my dough tearing when I press?

- Usually this is caused by under mixing the dough in the mixer - *mix on slow speed for a minimum of 10 minutes*
- Cold or frozen particles in the dough

Q: What temperature should I be pressing the dough?

- Cold dough could vary from 130°F to 170°F
- Warm dough or room temperature dough 100°-110°F

Q: How long should I be pressing the dough?

- Warm dough 2-7 seconds
- Cold dough 5-10 seconds

Q: Will the heat kill the yeast?

- NO - *yeast dies at 180°F for 2-minutes - The temperature we are pressing could range from 100°-170°F for a maximum pressing time of 10 seconds. This will not affect the yeast in the dough.*

Q: Is 18" the only size crust I can get with this press?

- No - *The weight of the dough ball and your thick & thin setting will determine the size of your crust. Different dough ball weights will determine the size of your crust.*

Q: How do I get an edge with the press?

- Press out dough normally - (2) ways you can get an edge...
 - a. *After pressing crust, form edge by hand*
 - b. *When saucing crust leave a 1/4" to 1/2" ring from the edge to let your oven bake the edge naturally for a nice handmade look.*

CLEANING / MAINTENANCE

WARNING: Before cleaning, performing maintenance or repairs make sure the machine is turned off and the machine is unplugged.

******This appliance is not waterproof. Never spray or pour water or any other cleaning solution onto this appliance.******

CLEANING ALUMINUM UNCOATED HEAT PLATEN(S).

1. Unplug the machine and allow it to cool.
2. Open the heat platen for easier access.
3. Dampen a nonmetallic scrubbing sponge with a mild soap or detergent to remove any excess material from the heat platen(s).
4. Wipe clean with a dry cloth.

CLEANING PTFE COATED PLATEN(S) (OPTIONAL FEATURE).

1. Unplug the machine and allow it to cool.
2. Open the heat platen for easier access.
3. Clean the PTFE coated platen with a mild soap and warm water applied with a soft cloth or sponge. Do not use steel wool, scrub sponges, kitchen or oven cleaners or any other kind of abrasive material. This will damage the coating.
4. Wipe clean with a dry cloth.

CLEANING OUTSIDE SURFACES OF THE MACHINE

Use a mild soap and warm water applied with a soft cloth or sponge. Do not use steel wool, scrub sponges, kitchen or oven cleaners or other abrasives that will damage the painted surface.

LUBRICATION

Your press requires lubrication every 15,000 cycles or every 6 months. Use NSF/NLGI2 rated food grade grease (such as Bel-Ray No-Tox #2 or equivalent). Lubricate all moving or hinged points.

CIRCUIT BREAKER RESETTING

Should the circuit breaker trip, simply allow the machine to cool for 2 minutes and then reset the circuit breaker by pressing the button back in to allow the machine to come back on. If the circuit breaker continues to trip, have an electrician diagnose the cause of the fault.

WARRANTY



**BEFORE warranty repair you MUST get
Prior Authorization: Call 1-800-835-0606**

Warranty will be voided otherwise.

NOTICE

Our system will automatically register the equipment on the date it was shipped. If the equipment was not purchased directly from HIX, but through a distributor (either domestic or foreign), please keep a copy of their sales invoice showing the serial number and date it was sold/shipped to you with this warranty. In this case, we will use the distributor's invoice date as the beginning warranty date. **STAPLE A COPY OF YOUR RECEIPT TO THIS WARRANTY** and keep in a safe place to provide verification of your warranty should a problem occur. Thank you.

Please fill in the following information and attach a copy of your receipt for your records.

Date Purchased: _____ From: _____

Model #: _____ Serial #: _____

This warranty applies to equipment manufactured by the HIX Corporation (HIX), Pittsburg, Kansas, U.S.A. HIX warrants to the original purchaser its Dough, Tortilla and Poultry Presses against defects in workmanship and material, except for wear and tear for a period of "One Year" from the date of purchase. All dough press carts, compressors, and accessories are warranted for 90 days from the date of purchase.

In the event of a defect, HIX, at its option, will repair, replace or substitute the defective item at no cost during this period subject to the limitations of insurance and shipping costs stated below.

This warranty does not cover normal wear and tear, damages due to accident, misuse/abuse, alterations or damage due to neglect or lack of proper lubrication or maintenance. HIX shall not be responsible for repairs or alterations made by any person without the prior written authorization by HIX. This warranty is the sole and exclusive warranty of HIX and no person, agent, distributor, or dealer of HIX is authorized to change, amend or modify the terms set forth herein, in whole or in part.

In the case of a problem with the equipment identified herein, HIX Corporation should be contacted during regular business hours to discuss the problem and verify an existing warranty. HIX personnel will assist the customer to correct any problems which can be corrected through operation or maintenance instructions, simple mechanical adjustments, or replacement of parts. In the event the problem cannot be corrected by phone, and upon the issuance of a return authorization by HIX, the equipment shall be returned to HIX or an authorized service representative. All insurance and shipment/freight costs are solely the responsibility of the customer, and not that of HIX, and HIX shall not be responsible for improper handling or damage in transit. HIX customer service personnel may be contacted for complete return authorization and reconditioning information.

This expressed warranty is given in lieu of any and all other warranties, whether expressed or implied, including but not limited to those of merchantability and fitness for a particular purpose, and constitutes the only warranty made by HIX Corporation.

In no event shall HIX's liability for breach of warranty extend beyond the obligation to repair or replace the nonconforming goods. HIX shall not be liable for any other damages, either incidental or consequential, or the action as brought in contract, negligence or otherwise.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

HIX CORPORATION
Food Equipment Division

1201 E. 27th Terrace • Pittsburg, KS 66762 • U.S.A.
(620) 231-8568 • Fax: (620) 231-1598

E-Mail: mail@hixcorp.com • Website: www.doughxpress.com

©2011 HIX Corp.