

OPERATOR'S MANUAL

SwingMan-15

Value Series Manual Heat Transfer Machine



For Customer Service:
Call 1-800-835-0606 or Visit hixcorp.com



CONTENTS

<i>Receiving & Setup</i>	3
<i>Temperature & Pressure</i>	4
<i>Operation</i>	5
<i>Troubleshooting</i>	6
<i>Repairs & Maintenance</i>	7
<i>Parts List</i>	8-9
<i>Warranty</i>	10

BEFORE warranty repair you MUST get Prior Authorization



RECEIVING & SETUP

SHIPPING OR RETURNS

NOTE: *Save all of your shipping/packing material. Do not risk costly shipping damage, ship only in original box.*

1. Fasten machine to plywood shipping base with bolts provided.
2. Tie or tape handle securely to base.
3. Place in original box, and put side liner and top liner in place. Fold flaps and seal the box. (Additional bottom boards, box and liners may be obtained from your supplier for a normal cost.)

UNPACKING


Remember to save all packing materials - including box, liner, and board. You may need these for shipping your machine or if a repair is necessary in the future.

INSPECTION

Inspect your machine for hidden shipping damage. Contact the delivery company immediately, should you find damage.

INSTALLATION

1. Remove plywood shipping base bolts (see A and B) and screw on feet or affix self-adhesive rubber feet provided

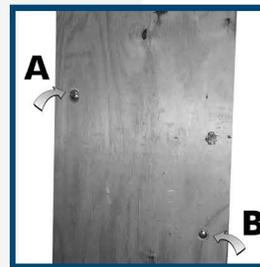

CAUTION: Handle must be tied to base before moving or shipping.

2. Carefully cut tape/wrap holding machine closed.
3. Plug the machine into the correct grounded electrical outlet.


WARNING: When using an extension cord, use 12 or 14 ga.-3 conductor.
Maximum length, 25' (7.762 m).

TEMPERATURE & PRESSURE


ON/OFF & TEMPERATURE

1. Turn the temperature knob to the desired setting (refer to your transfer manufacturer's guidelines). Heat indicating light will come on. While the machine is heating, the heat light will remain on until

Temperature knob

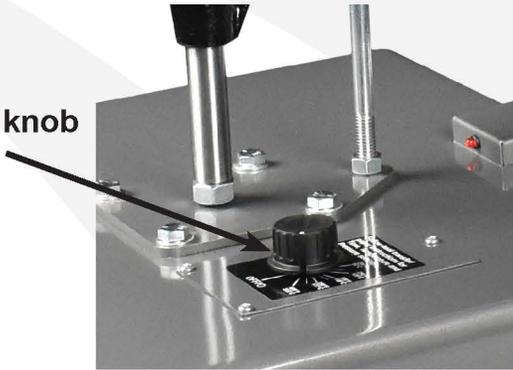

Heat indicating light

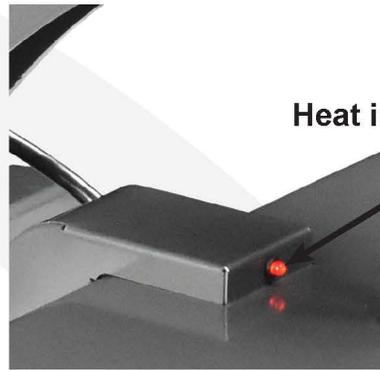

it has reached set temperature. The heat light will cycle on and off in order to maintain the desired temperature.

2. Turn the temperature knob to "OFF" position when you are done.

PRESSURE ADJUSTMENT

1. The pressure control knob, located on the top of the machine, should be set so that the heat head will lock down firmly.



Pressure control knob

2. Pressure is reduced by turning knob (with machine open) counter-clockwise and increased by turning it clockwise.

NOTE: Adjustments may be required from one garment to another and will vary to achieve the desired result.

WARNING: Excessive pressure can cause structural damage, voiding the machine warranty!

OPERATION

TRANSFER APPLICATION

1. Set the temperature, time, & pressure to the desired settings as instructed. Always consult your specific transfer recommendations. Typical settings are; **COLD PEEL**: 350°F (177°C), 15 seconds and **HOT SPLIT**: 375°F (190°C), 10-12 seconds.

2. Align substrate on lower platen. Smooth wrinkles from garments.

NOTE: Wrinkles may be removed by bringing the heated platen in contact with the garment for a few seconds before the transfer is positioned.

3. Position the transfer in the desired location on the substrate.

NOTE: The transfer image should be “mirrored” before transferring except when transferring to substrates where the image shows through, i.e. glass tiles and cutting boards.

***TIP:** When transferring double sided or sublimation transfers to garments, always place a sheet of transfer paper or a PTFE sheet between the layers of the garments to avoid bleed through or reheating of the applied transfer.*

4. Swing the upper heat platen over the lower platen. A stop is installed for perfect alignment between the upper and lower platens.

5. Pull the handle down until the handle locks.

6. Continuously peel the paper off the transfer and garment.

NOTE: Do not fold the transfer back on itself. Successful transfer work depends on the correct balance of time, temperature and pressure. The type and thickness of the material and the kind of transfer being used will determine what settings are necessary.

For hot peel/split transfers, immediately peel the paper after the machine has opened. Do not allow the transfer to cool. For cold peel transfers, rub the transfer with an eraser or cloth and allow to cool for 5-10 seconds before removing the release paper.

TROUBLESHOOTING

NOTE: Specific application instructions are enclosed with transfers.

1. Be sure to set the heat transfer machine to the transfer manufacturer's recommended temperature, time, and pressure settings. If you don't have these specifications, contact your transfer supplier for this information and any other special application instructions, as many of the new "high tech" transfers require significantly different settings and/or application techniques than those from years past.
2. When you start up your press for the first time each day, preheat the pad for a minute. If the press has sat for 3-5 minutes without use, be sure to "preheat" the pad for 10-15 seconds before loading the shirts or making the first transfer.
3. After the shirt is positioned and centered on the preheated pad, "prepress" the shirt for 3 seconds to take the wrinkles out and more importantly, release the excess moisture out of the fabric which can reduce the chance of a successful transfer.
4. With all of the above recommendations, try making a transfer.
5. If you have an area that isn't transferring completely or as you would like it to, follow these steps to determine the problem.
 - a. Try increasing the pressure on the machine by 10-20%
 - b. Recheck the transfers recommended temperature and the press readout. You may want to increase the temperature 10 degrees
 - c. Try increasing the application time by 2-4 seconds
 - d. If after trying these things, there is still a "specific" area that isn't coming out as you would like it to, then try the same type of transfer on a scrap shirt but rotate the transfer 180 degrees. If after doing this, the problem is in the same physical location on the machine, then you probably have a problem with the pad or possibly a warped platen if the machine has ever overheated severely. On the other hand, if the transfer failed in the same area on the transfer, then you most likely have a problem with the transfer or it's application settings and you should contact your transfer supplier to discuss the problem.

Following these basic guidelines can help you be more successful with each and every transfer!

REPAIRS

WARNING: Before making repairs, be sure ON/OFF switch is OFF and machine is unplugged!

THERMOSTAT

1. If there is little/no heat or the machine overheats, your thermostat may need replaced.
2. Call HIX technical service at 800-835-0606 or visit www.hixgraphics.com for instructions and to order

FUSE REPLACEMENT

1. Remove the bottom cover of the machine and locate the internal fuse holder on inside of the machine.
2. Remove blown fuse. Replace with an mda-15 fuse.
3. Replace the bottom cover of the machine.

RELAY BYPASS

1. Remove the back cover of the machine.
2. Remove wire #26 from terminal #2 on the relay.
3. Loosen terminal #1 on the relay and replace wire #26 along with wire #12 under terminal #1.
4. Tighten the connection.
5. Plug the machine in and turn the power switch on.

NOTE: Replace the relay if the machine starts heating. This is a test only. Do not operate the machine with the relay bypassed.

MAINTENANCE

LUBRICATION:

Your press requires lubrication every 15,000 cycles or every 6 months.

Lubricate weekly in a heavy use production environment.

Use NSF/NLG12 rated food grade grease (such as Bel-Ray No-Tox #2 or equivalent).


A general purpose food grade machine oil spray is also acceptable such as CRC03055 lubricant (available from retailers such as Amazon).

Lubricate all moving or hinged points.

CLEANING HEAT PLATEN:

Clean the heat platen with steel wool, scrubbing aluminum sponge, or fine wire brush.

REPLACEMENT PARTS LIST

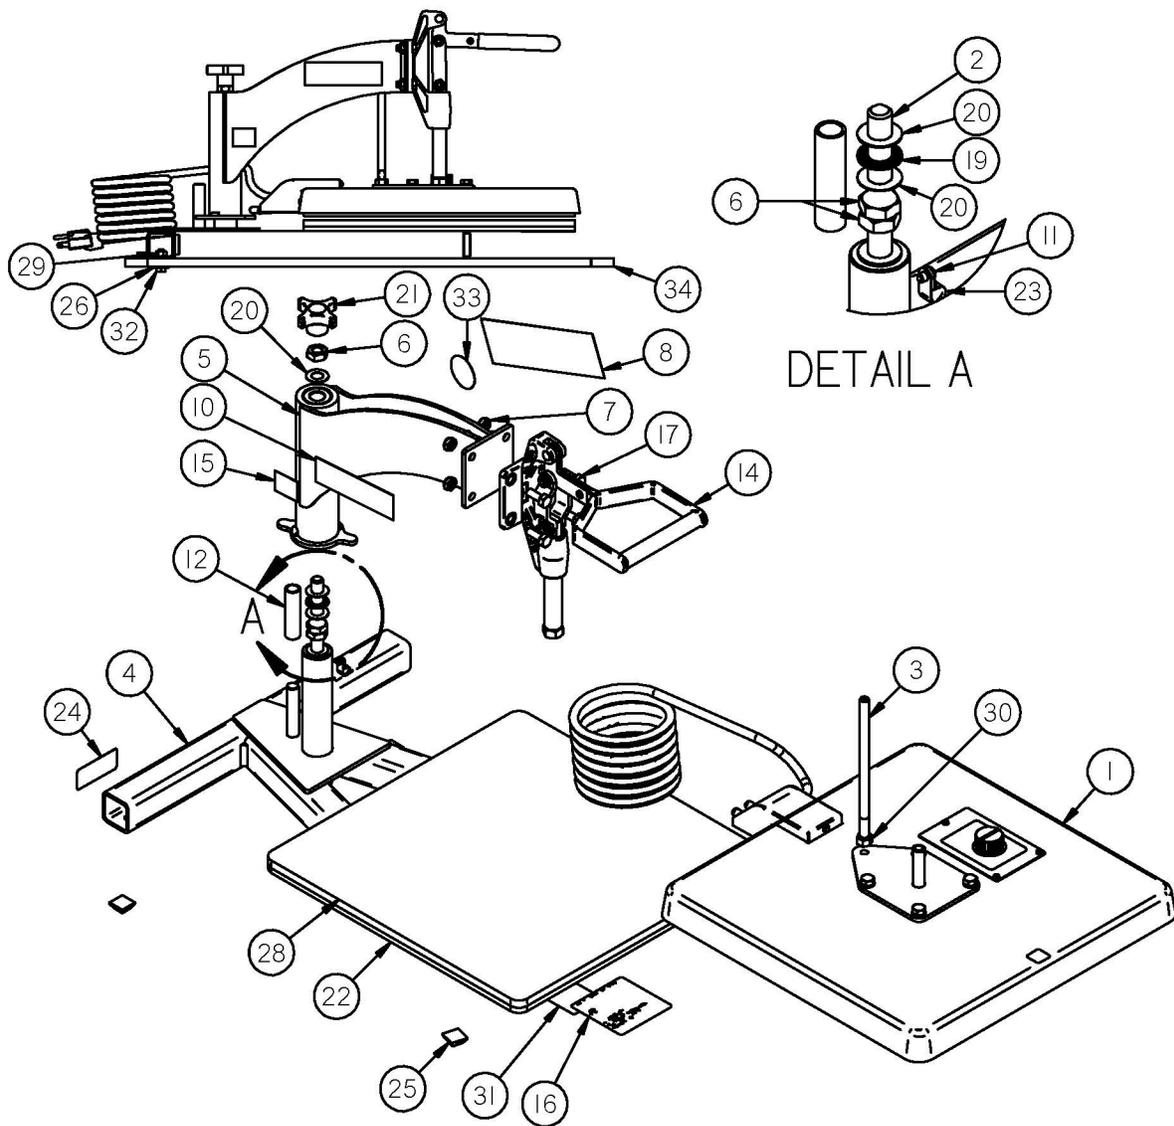

REPLACEMENT PARTS LIST

ITEM#	PART#	TITLE	ITEM#	PART#	TITLE
1	9143002	ASSEMBLY, SWINGMAN PLATEN 15 X 15 120V			
2	9141010	SWG15 PRESSURE ADJ ROD			
3	9141009	SWINGMAN 15 ANTI-ROTATION BOLT			
4	9141000	WELDMENT, SWINGMAN 15 FRAME			
5*	9140030	WELDMENT, SWINGMAN 15 PIVOT ARM CURVE			
6	87056	NUT 1/2-13 JAM			
7	71662	NUT 5/16-18 JAM NYLON INSERT ZPS			
8	71015	DECAL SWINGMAN 15 LOGO			
9	70818	TIMER DIGITAL HAND TAYLOR 5827			
10	70732	DECAL HIX LOGO 4"x1"			
11	70700	SCREW MCH 10-24x0.250 RHPH			
12	7051035	TXM15 MAIN ARM STOP SLEEVE			
13	70479	MANUAL OWNERS SWINGMAN 15/20			
14	70426	CLAMP TOGGLE TXM15 SHOVEL DIP			
15	70362	DECAL, CERTIFIED GREEN			
16	70268	DECAL HIX I.D. 3" X 3" SILVER			
17	68055	BOLT 5/16-18x0.875			
18	63886	BOXHT SWINGMAN LINER			
19	63622	BEARING THRUST .500x0.937x.078			
20	63320	BEARING WSHR .500x0.937x.031			
21	62898	KNOB PHENOLIC SWINGMAN			
22	59883	PLATEN 15 X 15 UNIVERSAL			
23	59765	STRAP LOOP NYLON 5/16			
24	33605	DECAL, UNPLUG MACHINE			
25	28010	BUMPON BLACK .81"x.30"			
26	16683	WASHER FLT .375x0.875x.078 ZPS			
27	14907	BOXHT PRESTO 15 BOX			
28	14842A	PAD 15x15x3/8 BLACK			
29	14605	NUT 5/16-18 ZPS			
30	14571	NUT 3/8-16 ZPS			
31	10964	DECAL, QR CODE HTM			
32	10769	BOLT 5/16-18x1.000			
33	10664	DECAL MADE IN USA			
34	0101013	SWINGMAN 15 MOUNTING BOARD			

WARRANTY

BEFORE warranty repair you MUST get Prior Authorization: Call 1-800-835-0606 Warranty will be voided otherwise.

(Effective 9/1/2021)

HIX® Corporation (HIX) will automatically register the equipment on the date it was shipped to you or your distributor. If the equipment was not purchased directly from HIX, but through a distributor, please keep a copy of their sales invoice showing the serial number and date it was sold/shipped to you with this warranty. In this case, we will use the distributor's invoice date as the beginning warranty date. **STAPLE A COPY OF YOUR PROOF OF PURCHASE TO THIS WARRANTY** and keep in a safe place to provide verification of your warranty should a problem occur. Thank you.

Please fill in the following information and attach a copy of your receipt for your records.

Date Purchased: _____ **From:** _____
Model #: _____ **Serial #:** _____

This warranty applies to Graphics equipment manufactured by the HIX® Corporation (HIX), Pittsburg, Kansas, U.S.A. HIX warrants to the original purchaser, its Heat Transfer Machines, Ovens and Dryers, Printers, Spotheaters and Exposure Units, against defects in workmanship and material, except for wear and tear for a period of "One Year" from the date of purchase. HIX warrants Accessories for a period of 90 days from the date of purchase. doughXpress® products are covered under separate warranty.

In the event of a defect, HIX, at its option, will repair, replace or substitute the defective item at no cost during this warranty period subject to the limitations of insurance and shipping costs stated below (excludes labor).

In the case of heat transfer presses (except the Hobby Lite® and Large Format presses), HIX warrants the heat casting for the "Life" of the machine for the original purchaser. If a part becomes obsolete at the time for repair, and/or cannot be reasonably substituted for, HIX will credit, at half the then current list price or last recorded price, only that part toward a new machine or any product HIX offers. This credit offer shall be the sole responsibility of the HIX in the event of an obsolete part.

This warranty does not cover belts, rail tape, pads, mug wraps, canvas, rubber blankets, bulbs, glass. Warranty does not cover damages due to accident, misuse/abuse, alterations or damage due to neglect, shipping or lack of proper lubrication or maintenance. HIX shall not be responsible for repairs or alterations made by any person without the prior written authorization by HIX. This warranty is the sole and exclusive warranty of HIX and no person, agent, distributor, or dealer of HIX is authorized to change, amend or modify the terms set forth herein, in whole or in part.

In the case of a problem with the equipment identified herein, HIX should be contacted during regular business hours to discuss the problem and verify an existing warranty. HIX personnel will assist the customer to correct any problems which can be corrected through operation or maintenance instructions, simple mechanical adjustments, or replacement of parts. In the event the problem cannot be corrected by phone, and upon the issuance of a return authorization by HIX, the equipment shall be returned to HIX or an authorized service representative. All insurance, packaging and shipment/freight costs are solely the responsibility of the customer, and not that of HIX, and HIX shall not be responsible for improper packaging, handling or damage in transit. Contact HIX customer service for complete return authorization information. Correct shipping boxes are available from HIX.

This expressed warranty is given in lieu of any and all other warranties, whether expressed or implied, including but not limited to those of merchantability and fitness for a particular purpose, and constitutes the only warranty made by HIX.

In no event shall HIX's liability for breach of warranty extend beyond the obligation to repair or replace the nonconforming goods. HIX shall not be liable for any other damages, either incidental or consequential, or the action as brought in contract, negligence or otherwise.

This warranty gives you specific legal rights and you may also have other rights which vary from state to state.



1201 E. 27th Terrace • Pittsburg, KS 66762 • U.S.A.

Phone: (800) 835-0606 • Fax: (620) 231-1598

Web site: hixcorp.com • E-Mail: support@hixcorp.com